

# 127mm 8/9 6.0 stg



<b>0.135 rev/L</b>	<b>10,342 kPa</b>
<b>Speed Ratio</b>	<b>Max Differential Pressure</b>

<b>General</b>	
Make Weatherford	Model 5 8:9 6.0 (250)

<b>Rotor</b>		<b>Performance</b>	
Overall Length	6,121 mm	Torque Slope	0.960 N.m/kPa
Contour Length	5,969 mm	Flow Range	757 - 1,325 L/min
Eccentricity	4.100 mm	Speed Ratio	0.135 rev/L
Major Diameter	81.2 mm	Speed Range	102 - 179 rpm
Head Diameter	85.9 mm	Off Bottom Pressure	N/A kPa
Weight	182 kg	Max Diff. Pressure	10,342 kPa
Thread Form	N/A	Maximum Torque	9,928 N.m

<b>Stator</b>		<b>Fit</b>	
Overall Length	6,350 mm	Nominal Fit Temp	20.0 °C
Tube O.D.	127.0 mm	Nominal Fit STD	0.014 in.
Tube I.D.	101.6 mm	Fit Change (*)	1.8 °C/0.001"
Weight	247.0 kg		
Rubber Type	250		

\* Temperature change required to change stator ID by 0.001"

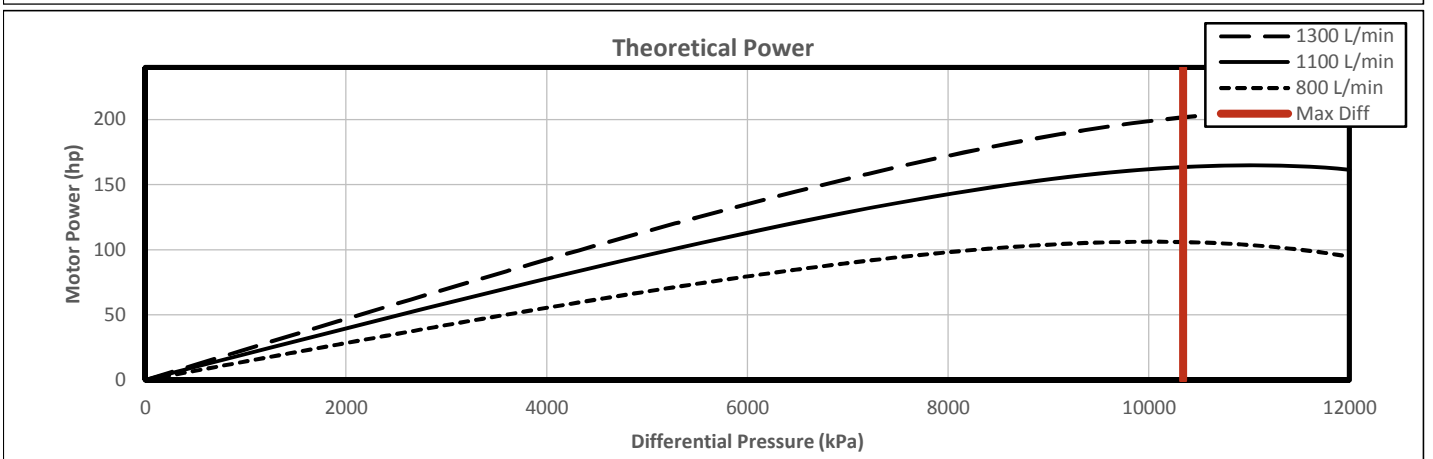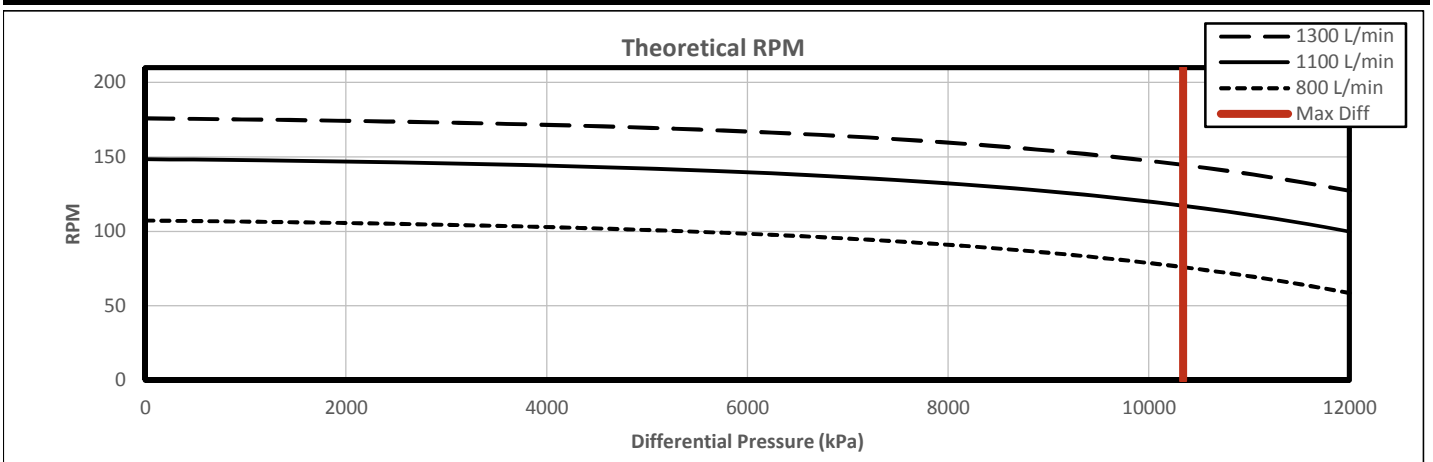

Performance curves for reference only, actual performance will vary based on fit, temperature, drilling fluid and condition. Operation beyond the specified limits may result in damage to the power section and/or connected components. Information is subject to change.